WE GUARANTEE A CONSTANTLY HIGH QUALITY TO CONSUMERS

### Why should you choose the EVO system?

**THE CONNECTOR** can be used to perfectly connect stacks with a roof penetration. Its functional features, design and proven technical solutions make their way into the world of the state-of-the-art technology.



# WIROVENT **EVO**new system

### **Available products**

Vent stack with condensate discharge Insulated vent stack Insulated roof fan

Insulated roof fan

150 Vent Insul Rota

Vent stack with condensate discharge Insulated vent stack
Rotary vent stack with condensate discharge (aluminum bearing turbine)
Rotary vent stack with condensate discharge HYBRID (stainless steel bearing turbine)

**Material**: High quality PP plastic blend with UV stabilizer, weather resistant.









Correct air flow without narrowing the ventilation duct



Hidden fastening bolts



Built-in level for easy levelling of the stack

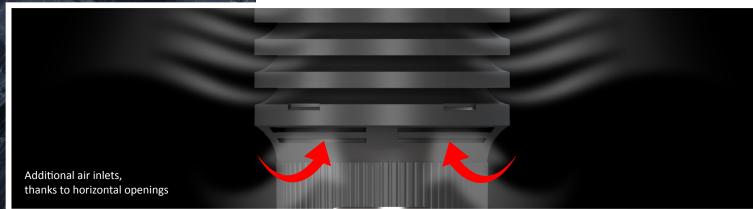





We are often unaware of the fact that moisture is a ubiquitous element of the air. If there is more of it in the apartment than we, as humans, require, it should be treated as an pollutant and its excess should be removed by ventilation. When exhaust air clashes with lower outside temperature, condensation may appear on the inner walls of the stack, causing rising damp of ventilation ducts, which significantly increases the risk of mold and fungi formation.

The risk of condensate formation is the greatest during the winter, as well as during the year-round operation of rooms that generate large amounts of water vapor, and such as bathrooms or kitchens. In order to solve the problem, we have developed stacks with high-capacity ducts, allowing for optimum discharge of condensate outside of the stack.



## 229.5 mm 202.5 mm DIAMETERS MM 447 mm U [m/s] 440 WiroVent EVO 150 150 mm U [m/s]

#### Roof penetration types:



F profile T-18/T-18+/T-20+





Diament Plus

H profile Diament Eco Plus

Normal Estima/ Kingas/Kingas Eco Tysenia/Retro base Plus/Kingas 15



#### Standard RAL colors:











Red RAL 3009





#### Supplementary accessories:



Ø150 Index U81R



Index U4506 Ø150 Index U6106



CONDENSATE WATER **CONDENSER** Ø125 Index U7000 Ø150

Index U8000





SEALING FLANGE PENETRATION OF THE STACK PIPE THROUGH THE MEMBRAN



#### Additional range:



K84 – sewage vent hole



P48 – antenna penetration

S48 – solar penetration





## WIROVENT **EVO**



\*\*NewInnovativeTechnology



new

of experience